

Proportional Solenoid

Product Code: GV40-4A5


SM-CCBZ-128

Technical Parameters

Rated Voltage (V)	24	Rated current (mA)	800
Resistance ($\Omega/20^{\circ}\text{C}$)	10.8 ± 0.5	Rated Force (N)	42 ± 0.5
Force Lag Characteristic (%)	2	Current Lag Characteristic (%)	2
Repeat Accuracy (%)	1	Duty Time (%)	100
Push rod length (mm)	10.5 ± 0.15	Push back length (mm)	7.4 ± 0.2
Oil Pressure Duration (MPa)	21	IP Grade	IP65

S—F CURVE

Testing Current: 0.80A

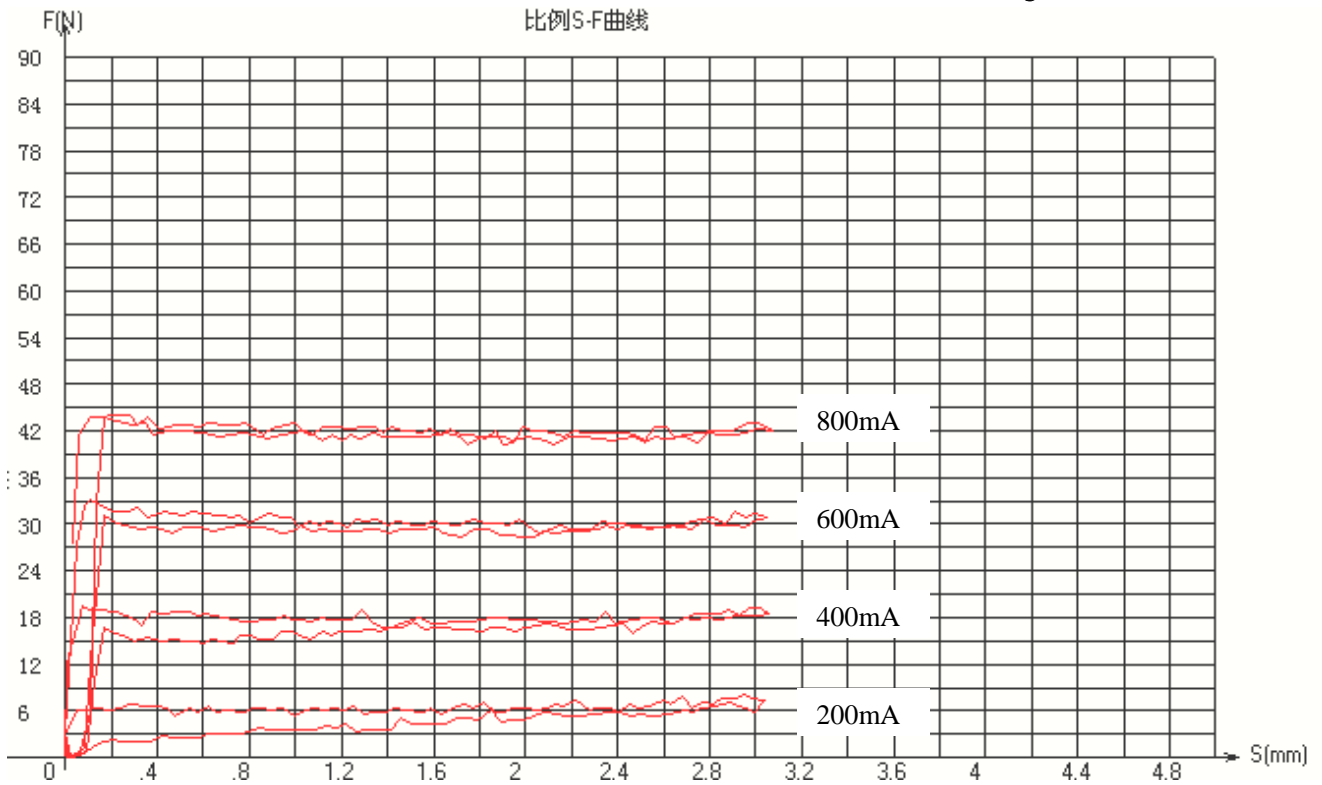

Outside shape and installation dimensions

