

Specification of Push-pull Type Solenoid

Model No : SWM-G02-30


SM-CCBZ-001

Technical Data

Electrical Type	DC	Rated Voltage (V)	12
Voltage Fluctuation (%)	± 10	Power Consumption (W)	26
Rated Force (N)	≥ 18	Cold Current (A)	2.2
Full Stroke (mm)	≥ 4.6	Rated Stroke (mm)	2.0
Insulation Grade	H/180°C	Relative Duty Rating (%)	100
Oil Pressure Duration (MPa)	21	Protection Grade	IP65
Operating Frequency (t/h)	15000	Life Time (t)	10×10^6

S—F Characteristic Curve

Test Current : 1.4A

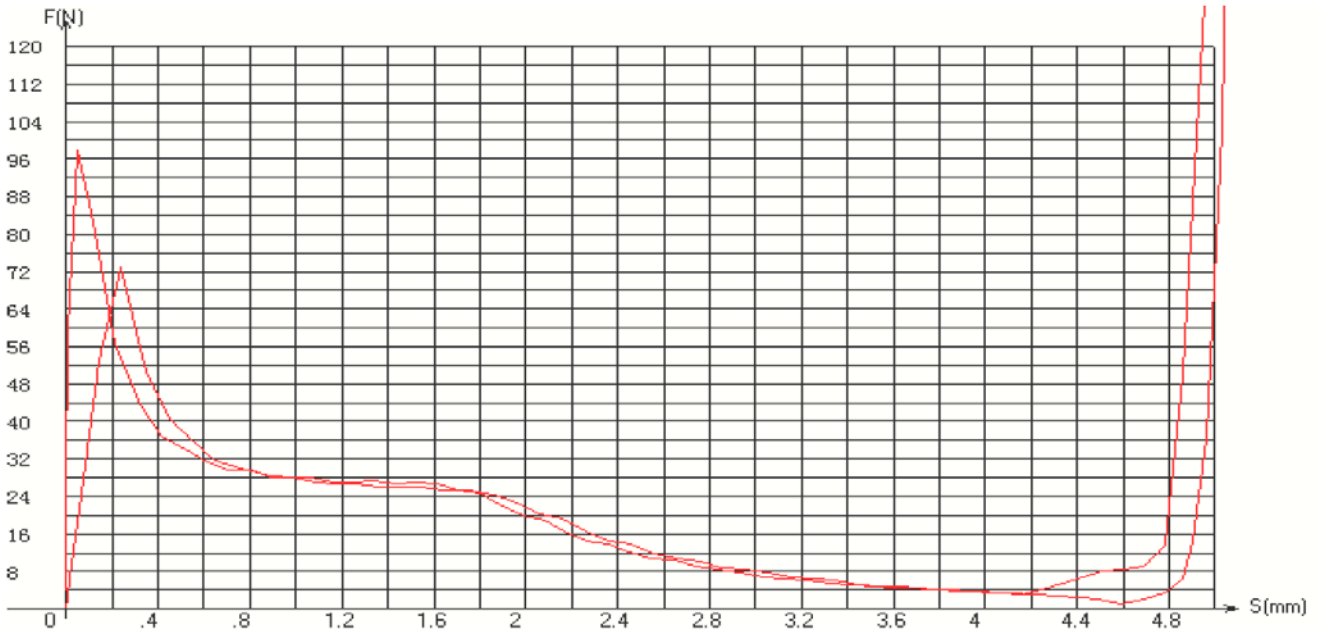

External Shape and Connected Dimension

